

Backlighting modes

Fn + F10 Switch modes between :

- Full Backlight
- Breathing
- Raindrop
- Reactive
- Ripple
- Off

Fn + ↑ Increase/Decrease brightness

Fn + ↔ Increase/Decrease speed

Fn + F10 Hold 3s to turn off all lights

LED Zone Customization Mode

Fn + F11 CM1 Cycle:

1. Turn on user custom zone.
2. Breathing of custom zone.
3. Turn off CM1.

Fn + F12 CM2 Cycle (Refere to CM1 Cycle)

Fn + PrtSc Start record CM1

Fn + Pause Start record CM2

Caps Lock + ↑ Adjust current brightness

Caps Lock + End recording

Scroll Lock

Important: Adjust brightness, then set keys to be set to that color.

Recording Steps:

1. Start record CM1 or CM2.
2. Choose brightness, Caps Lock show the current brightness.
3. Hit an individual key to set it to the current brightness.
4. Repeat 2 and 3 to have diffrents brightness.
5. Finish recording

Reset Factory Default

EU ISO Layout Left & Right Win keys

US ANSI Layout Left & Right Win keys

JP JIS Layout Fn + Left Win key

Hold for 3 seconds, the keyboard backlighting will flash 3 times to confirm.

DEMO mode

Hold **Left Ctrl + Left Shift + Caps Lock** then plug the keyboard into power source.

USB Repeat Acceleration

Fn + F9 Function mode On/Off (Must hold for 3s)

Fn + F1-F4 Repeat Delay 1x, 2x, 4x or 8x (Adjust USB repeat Delay Time)

Fn + F5-F8 Repeat Rate 1x, 2x, 4x, 8x (Adjust USB Repeat Rate)

Can only be adjusted under **Function mode**.

USB Repeat Acceleration may work differently in different applications.

DIP Switch Functions

Fn Key Located	Left				Right				None Fn
	Ctrl	Win	Alt	Alt	Win	App (default)	Ctrl		
DIP 1	OFF	ON	OFF	ON	OFF	OFF	ON	ON	
DIP 2	ON	OFF	OFF	ON	ON	OFF	OFF	ON	
DIP 3	ON	ON	ON	OFF	OFF	OFF	OFF	ON	
	OFF (Default)				ON				
DIP 4	N-Key Rollover mode				6-Key Rollover mode				

Switch Macro Profiles

Fn + 1-6 Switch to profile x

1 : Default Key function

2-6: Customize Macro Key Features

Macro Record Option

Fn + 1-6 0.02s, 0.1s, 0.2s, 0.4s, 0.8s, 1s

Fn + Ctrl Macro Open / Shortcut keys recording (hold 3s)

Default Macro function is based on user's typing speed.


Macro implementation option

Fn + Q Start macro on key press

Fn + W Start macro repeatidly on key press until press again to stop

Fn + R Repeat macro while key pressed

Marco Diagram

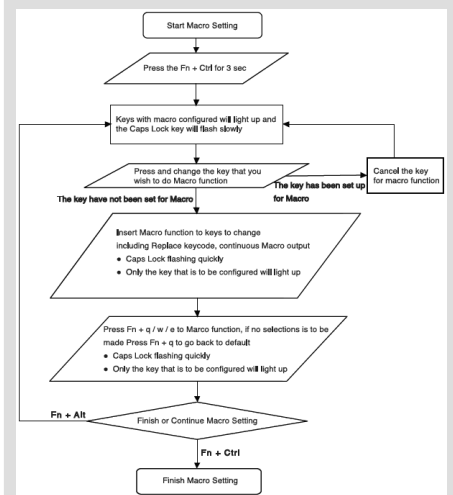

Exemple: Press **Fn + A** to insert [Ducky] repeatedly until released

Steps: **Fn + Ctrl** for 3s → **Fn + A** → Insert Ducky → **Fn + E** → **Fn + Ctrl**