Ducky One Keyboard Cheat Sheet

by newprog via cheatography.com/30126/cs/8925/

Backlighting modes

Fn + F10	Switch modes between : - Full Backlight - Breathing - Raindrop - Reactive - Ripple - Off
Fn + ↕	Increase/Decrease brightness
Fn + ↔	Increase/Decrease speed
Fn + F10	Hold 3s to turn off all lights

LED Zone Customization Mode

Fn + F11	CM1 Cycle: 1. Turn on user custom zone. 2. Breathing of custom zone. 3. Turn off CM1.
Fn + F12	CM2 Cycle (Refere to CM1 Cycle)
Fn + PrtSc	Start record CM1
Fn + Pause	Start record CM2
Caps Lock + ↕	Adjust current brightness
Caps Lock + Scroll Lock	End recording

Important: Adjust brightness, then set keys to be set to that color.

Recording Steps:

1. Start record CM1 or CM2.
2. Choose brightness, Caps Lock show the current brightness.
3. Hit an individual key to set it to the current brightness.
4. Repeat 2 and 3 to have diffrents brightness.
5. Finish recording

Reset Factory Default

EU ISO Layout	Left & Right Win keys
US ANSI Layout	Left & Right Win keys
JP JIS Layout	Fn + Left Win key

Hold for 3 seconds, the keyboard backlighting will flash 3 times to confirm.

DEMO mode

Hold **Left Ctrl + Left Shift + Caps Lock** then plug the keyboard into power source.

USB Repeat Acceleration

Fn + F9	Function mode On/Off (Must hold for 3s)
Fn + F1-F4	Repeat Delay 1x, 2x, 4x or 8x (Adjust USB repeat Delay Time)
Fn + F5-F8	Repeat Rate 1x, 2x, 4x, 8x (Adjust USB Repeat Rate)

Can only be adjusted under **Function mode**. USB Repeat Acceleration may work differently in different applications.

DIP Switch Functions

Fn Key Located	Left			Right				None Fn
	Ctrl	Win	Alt	Alt	Win	App (default)	Ctrl	
DIP 1	OFF	**ON**	OFF	**ON**	OFF	**OFF**	**ON**	**ON**
DIP 2	**ON**	OFF	OFF	**ON**	**ON**	**OFF**	OFF	**ON**
DIP 3	**ON**	**ON**	**ON**	OFF	OFF	**OFF**	OFF	**ON**

	OFF (Default)	ON
DIP 4	N-Key Rollover mode	6-Key Rollover mode

Switch Macro Profiles

Fn + 1-6 Switch to profile x

1 : Default Key function

2-6: Customize Macro Key Features

Macro Record Option

Fn + 1-6 0.02s, 0.1s, 0.2s, 0.4s, 0.8s, 1s

Macro Record Option (cont)


Fn + Ctrl Macro Open / Shortcut keys recording (hold 3s)

Defautl Macro function is based on user's typing speed.

Macro implementation option

Fn + Q	Start macro on key press
Fn + W	Start macro repeatidly on key press until press again to stop
Fn + R	Repeat macro while key pressed

Marco Diagram

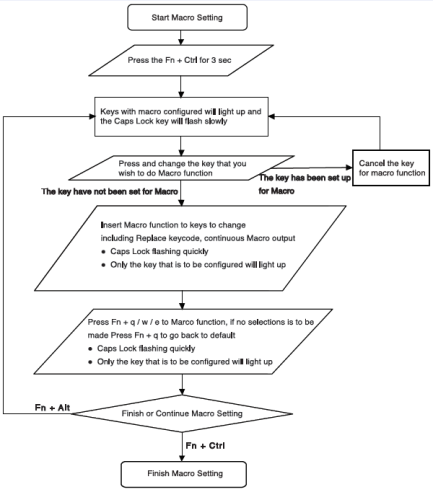

Exemple: Press Fn + A to insert [Ducky] repeatidly until released

Steps: Fn + Ctrl for 3s ➔ Fn + A ➔ Insert Ducky ➔ Fn + E ➔ Fn + Ctrl



By **newprog**

cheatography.com/newprog/

Published 24th August, 2016.

Last updated 24th August, 2016.

Sponsored by **Readable.com**

Measure your website readability!

https://readable.com