


Java Collections

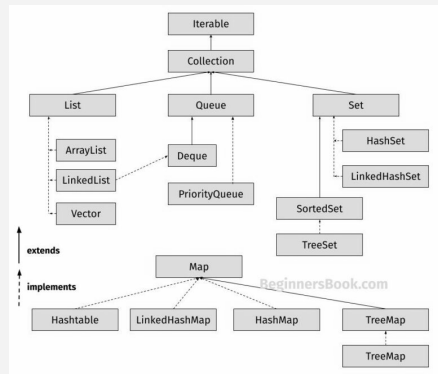

Arrays Class

```
import java.util.Arrays;
```

// Imports Arrays class from java.util package

***Key Points about java.util.Arrays:**

1. **Package: java.util** Contains utility classes for working with arrays
2. **Arrays Class Features:**
 - Provides static methods for array operations
 - Common operations include:
 - sort()**- Sorting arrays
 - parallelSort()** - Parallel sorting for large arrays
 - fill()** - Filling arrays with values
 - binarySearch()**- Searching in sorted arrays
 - copyOf()**- Creating copies of arrays
 - equals()**- Comparing arrays
 - toString()** - Converting array to String
3. **Usage Examples:**
 - Arrays.sort(array)** // Sorting
 - Arrays.fill(array, val)** // Filling
 - Arrays.toString(array)** // String representation
 - Arrays.copyOf(array, len)** // Copying
 - Arrays.equals(arr1, arr2)** // Comparing
4. **Benefits:**
 - Simplified array manipulation
 - Optimized implementations

Arrays Class (cont)

- Consistent behavior across different array types*/

Arrays Class

```
//Declare and initialize an array of integers
with values from 1 to 10

//The array must be sorted in ascending
order for binary search to work correctly
int[] numbers = { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 };

// Perform binary search to find element 4 in
the array

// Arrays.binarySearch() returns:
// Index of the element if found (zero-based)
// Negative value if element not found -(insertion point) - 1)

// Note: Array must be sorted before using
binarySearch
int index = Arrays.binarySearch(numbers,
4);

// Print the result

// In this case, it will print index 3 because 4
is at position 3 (zero-based indexing)
System.out.println("The index of element 4
in the array is " + index);

//Output - The index of element 4 in the
array is 3

/* Additional Notes:

1. Binary search is much faster than linear
search for large arrays

2. Time complexity is O(log n) where n is
array length

3. If array is not sorted, results will be
unpredictable

4. If element is not found, return value will
be negative

*/
```

Arrays Class

```
~// Initialize an Integer array with 10
elements

Integer[] numbers = { 10, 2, 32, 12, 15, 76,
17, 48, 79, 9 };

~// Arrays.sort() - Sorts array in ascending
order using quicksort algorithm
~// After sort: [2, 9, 10, 12, 15, 17, 32, 48,
76, 79]

Arrays.sort(numbers);

~//Arrays.parallelSort() - Sorts array using
parallel sorting for large arrays (threshold
8192 elements)
~// Since array is small (<8192), it will use
same algorithm as Arrays.sort()
~// After parallel sort: [2, 9, 10, 12, 15, 17,
32, 48, 76, 79]

Arrays.parallelSort(numbers);

~// Arrays.fill() - Fills entire array with
specified value (12)
~// After fill: [12, 12, 12, 12, 12, 12, 12, 12,
12, 12]

Arrays.fill(numbers, 12);

~// Print all elements of array using
enhanced for loop
for (int i : numbers) {
    System.out.print(i + " ");
}

/* Output:

12 12 12 12 12 12 12 12 12 12

*/
```

LinkedList,ArrayList

```
import java.util.ArrayList;

/*

1. Package: java.util

2. ArrayList class:

    - Implements List interface
    - Dynamic array implementation
```

LinkedList, ArrayList (cont)

```
> - Good for random access and storing/accessing elements
- Not synchronized (not thread-safe)
- Common operations:
  * add() - O(1) amortized
  * get() - O(1)
  * remove() - O(n)
  * contains() - O(n)
*/
import java.util.Iterator;
/*
1. Package: java.util
2. Iterator interface:
  - Provides methods to iterate through collections
  - Key methods:
    * hasNext() - checks if more elements exist
    * next() - returns next element
    * remove() - removes last element
returned
  - Safer than for loop for modification during iteration
  - Used in for-each loops internally
*/
import java.util.LinkedList;
/*
1. Package: java.util
2. LinkedList class:
  - Implements List and Deque interfaces
  - Doubly-linked list implementation
  - Good for frequent insertions/deletions
  - Common operations:
    * add() - O(1)
    * get() - O(n)
    * remove() - O(1) if position known
    * contains() - O(n)
*/
import java.util.List;
```

LinkedList, ArrayList (cont)

```
> /*
1. Package: java.util
2. List interface:
  - Ordered collection (sequence)
  - Allows duplicates
  - Main implementations:
    * ArrayList
    * LinkedList
    * Vector (legacy, thread-safe)
  - Defines common list operations:
    * add()
    * remove()
    * get()
    * set()
    * etc.
*/
```

LinkedList, ArrayList

```
// Create a new LinkedList to store Integer values
List<Integer> list = new LinkedList<>();
// Add elements to the LinkedList
list.add(1);
list.add(2);
list.add(3);
System.out.println(list); // Output: [1, 2, 3]
list.add(4); // Add 4 at the end of the List
System.out.println(list); // Output: [1, 2, 3, 4]
list.add(1, 50); // Add 50 at index 1 (shifts other elements right)
System.out.println(list); // Output: [1, 50, 2, 3, 4]
// Create a new ArrayList to be added to original list
List<Integer> newList = new ArrayList();
newList.add(150);
```

LinkedList, ArrayList (cont)

```
> newList.add(160);
list.addAll(newList); // Add all elements from newList to list
System.out.println(list); // Output: [1, 50, 2, 3, 4, 150, 160]
System.out.println(list.get(1)); // Output: 50 (element at index 1)
// Create a new ArrayList
List<Integer> list = new ArrayList<>();
list.add(10);
list.add(20);
list.add(30);
list.add(40);
list.add(50);
list.add(60);
list.add(70);
list.add(80);
System.out.println(list); // Output: [10, 20, 30, 40, 50, 60, 70, 80]
// Iterate using traditional for loop
for (int i = 0; i < list.size(); i++) {
    System.out.println("the element is " + list.get(i));
    /* Output:
    the element is 10
    the element is 20
    the element is 30
    the element is 40
    the element is 50
    the element is 60
    the element is 70
    the element is 80 */
}
// Iterate using foreach loop
for (Integer element: list) {
```

LinkedList,ArrayList (cont)

```
> System.out.println("foreach element is "
+ element);
/* Output:
foreach element is 10
foreach element is 20
foreach element is 30
foreach element is 40
foreach element is 50
foreach element is 60
foreach element is 70
foreach element is 80 */
}
// Iterate using Iterator
Iterator<Integer> it = list.iterator();
while (it.hasNext()) {
    System.out.println("iterator " + it.next());
    /* Output:
iterator 10
iterator 20
iterator 30
iterator 40
iterator 50
iterator 60
iterator 70
iterator 80 */
}
list.set(2, 1000); // Replace element at index
2 with 1000
System.out.println(list); // Output: [10, 20,
1000, 40, 50, 60, 70, 80]
System.out.println(list.contains(500)); //
Output: false (500 is not in the list)
list.remove(1); // Remove element at index 1
(20)
System.out.println(list); // Output: [10, 1000,
40, 50, 60, 70, 80]
```

LinkedList,ArrayList (cont)

```
> list.remove(Integer.valueOf(30)); //
Remove element 30 (if exists)
System.out.println(list); // Output: [10, 1000,
40, 50, 60, 70, 80]
list.clear(); // Remove all elements from the
list
System.out.println(list); // Output: []
```



By **AbhijayG**

cheatography.com/abhijayg/

Not published yet.

Last updated 4th April, 2025.

Page 3 of 3.

Sponsored by **CrosswordCheats.com**

Learn to solve cryptic crosswords!

<http://crosswordcheats.com>