


### Path operation

```
Path
parameters
@router.get("/{email_or_name}", response_model=UserOut)
async def users_read(email_or_name: str, current_user: UserIn = Depends(get_current_user)):
    query = users.select().where(
        or_(users.c.name == email_or_name,
            users.c.email == email_or_name)
    )
    result = await database.fetch_one(query)
    if not result:
        raise HTTPException(status_code=404, detail=f"The user {email_or_name} does not exist in the system.")
    else:
        return result
```

### Path

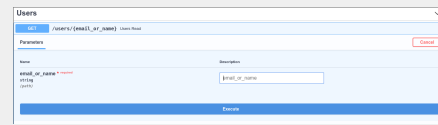

### Path w

C

By **euri10**

[cheatography.com/euri10/](https://cheatography.com/euri10/)

Not published yet.

Last updated 18th June, 2019.

Page 1 of 1.

Sponsored by **Readable.com**

Measure your website readability!

<https://readable.com>