

Document Outline

<!DOCTYPE html>	Indicates that this page is an HTML5 page	
<html> ... </html>	Root element of an HTML page	manifest lang
<head> ... </head>	Page information	
<body> ... </body>	Page content	

The attributes (3rd column) should be between single or double quotes.

There are also global attributes present for almost every tag:
 accesskey | class | contenteditable | contextmenu | data-* | dir | draggable | hidden | id | lang | spellcheck | style | tabindex | title | translate
 id must be unique within the HTML document

Page Information (inside <head>)

<base> .. </base>	Base URL for all the page links	href target
<meta> ... </meta>	Meta data	charset content http-equiv name
<title> ... </title>	Title	
<link> ... </link>	Resource link	href rel media hreflang type sizes
<style> ... </style>	Style definition	media type (default: CSS) scoped
<script> ... </script>	Script definition (JavaScript)	async type defer src charset

Document Structure

<h[1-6]> ... </h[1-6]>	Header 1 to 6
<div> ... </div>	Page section
 ... 	Inline section
<p> ... </p>	Paragraph
 	Line break
<hr>	Thematic break
<hgroup> ... </hgroup>	Heading group
<wbr>	Possible line-break

Text format

<i> ... </i>	<i>Italic text</i>
 ... 	Bold text
 ... 	Strong text
	<i>Emphasized text</i>
<mark> </mark>	Marked/Highlighted text
<u> ... </u>	Unarticulated annotation
 ... 	Deleted/Crossed-out text cite datetime
_{...}	Subscripted text
^{...}	Superscripted text
<small> ... </small>	Small text
<ins> ... </ins>	Inserted text cite datetime Usually displayed as underlines



By **Manon Gerrd**
(manongerard)

cheatography.com/manongerard/

Not published yet.
 Last updated 30th October, 2023.
 Page 1 of 5.

Sponsored by **ApolloPad.com**
 Everyone has a novel in them. Finish Yours!
<https://apollopad.com>

Text format (cont)

`<pre> ... </pre>` Preformatted text

Tables

`<table> ... </table>` Table

`<thead> ... </thead>` Table header

`<tbody> ... </tbody>` Table body

`<tfoot> ... </tfoot>` Table footer

`<tr> ... </tr>` Table row

`<th> ... </th>` Header cell
colspan | rowspan | scope

`<td> ... </td>` Table cell
colspan | rowspan | headers

`<colgroup> ... </colgroup>` Groups of table columns
span

`<col>` Attributes for table columns
span

`<caption> ... </caption>` Table caption

Embedded: images, video, audio, frame and object

`` Image
height | ismap | usemap | width

`<map> ... </map>` Image map
name

`<area> ... </area>` clickable area inside an image map
alt | coords | href | hreflang | media | ping | rel | shape | target | type

`<svg>` SVG graphics ...

Embedded: images, video, audio, frame and object (cont)

`<picture> ... </picture>` Container for multiple images resources

`<video> ... </video>` Video
src | poster | autobuffer | autoplay | loop | controls | width | height

`<audio> ... </audio>` Audio
autobuffer | autoplay | controls | loop | src

`<source> ... </source>` Source element for `<picture>`, `<video>` and `<audio>`
media | src | type

`<track>` External timed text tracks for `<video>` and `<audio>`
kind [captions | chapters | descriptions | metadata | subtitles] | src | srclang | label | default

`<iframe> ... </iframe>` inline sub window (frame)
src | name | sandbox | seamless | width | height

`<embed>` Container for an external application
height | src | type | width

`<object> ... </object>` Container for an external application
data | height | type | usemap | width | object

`<param>` Parameters of `<object>`
name | value

Better to use directly use ``, `<iframe>`, `<video>` and `<audio>` instead of `<embed>` or `<object>`



By **Manon Gerrd**
(manongerard)

cheatography.com/manongerard/

Not published yet.

Last updated 30th October, 2023.

Page 2 of 5.

Sponsored by **ApolloPad.com**

Everyone has a novel in them. Finish


Yours!

<https://apollopad.com>

Semantic elements

<code><header> ... </header></code>	Header of a section or page	
<code><nav> ... </nav></code>	Navigation links	
<code><section> ... </section></code>	Section element	<code>cite</code>
<code><article> ... </article></code>	Article	
<code><aside> ... </aside></code>	Aside element	
<code><footer> ... </footer></code>	Footer of a section or page	
<code><figure> ... </figure></code>	Figure element	
<code><figcaption> ... </figcaption></code>	Caption for <code><figure></code> element	
<code><details> ... </details></code>	Details of an element can be viewed or hidden	<code>open</code>
<code><main> ... </main></code>	Main content of the document	
<code><summary> ... </summary></code>	Visible heading for the <code><details></code> element	
<code><time> ... </time></code>	Date/time	<code>datetime</code>

Organization of semantic elements

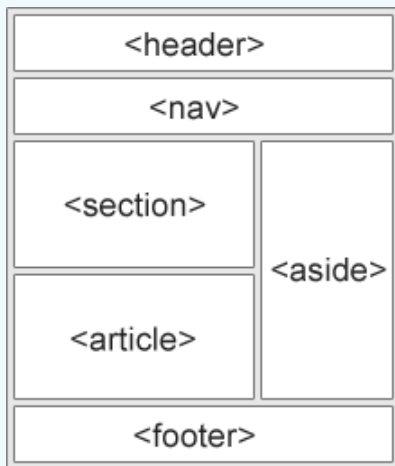

Lists

List type

<code> ... </code>	Ordered list	<code>start</code> <code>reversed</code> <code>type</code> [<code>1</code> / <code>A</code> / <code>a</code> / <code>I</code> / <code>i</code>]
<code> ... </code>	Unordered list	
<code><dl> ... </dl></code>	Definition list	

List element

<code> ... </code>	List item	<code>value</code>
<code><dt> ... </dt></code>	Definition term	

Lists (cont)

<code><dd> ... </dd></code>	Definition description
---	------------------------

Forms

<code><form> ...</code>	Form element	<code>method</code> [<code>get</code> / <code>post</code> / <code>put</code> / <code>delete</code>] <code>action</code> <code>data</code> <code>replace</code> <code>accept</code> <code>accept-charset</code> <code>enctype</code> <code>target</code>
<code></form></code>		



By **Manon Gerrd**
(manongerard)

cheatography.com/manongerard/

Not published yet.
Last updated 30th October, 2023.
Page 3 of 5.

Sponsored by **ApolloPad.com**
Everyone has a novel in them. Finish Yours!

<https://apollopad.com>

Forms (cont)

<input> Input field ...
 type [hidden | text | search | tel | url | email | password | datetime | date | month | week | time | datetime-local | number | range | color | checkbox | radio | file | submit | image | reset | button] |

Attributes are dependant upon input type
 accept | autocomplete | autofocus | checked | disabled | form | formaction | formenctype | formmethod | formnovalidate | formtarget | list | maxLength | max | min | multiple | name | pattern | placeholder | readOnly | required | size | step | value | alt | src | height | width

<label> Label for a form control
 </label>

Forms (cont)

<textarea> Text area
 autofocus | cols | disabled | form | name | readonly | required | rows | maxlength | placeholder | wrap

<select> ... </select> Drop-down list
 autofocus | data | disabled | form | multiple | name

<optgroup> ... </optgroup> Option group
 disabled | label

<option> ... </option> Option in a drop-down list
 disabled | label | selected | value

<legend> ... </legend> Fieldset title

<output> ... </output> Result of a calculation
 for | form | name

<fieldset> ... </fieldset> Fieldset
 disabled | form | name

<button> ... </button> Button
 autofocus | disabled | form | formaction | formenctype | formmethod | formnovalidate | formtarget | name | type | value

<datalist> ... </datalist> Dropdown list

<template> ... </template> Hidden content, whown upon action



By **Manon Gerrd**
 (manongerard)

cheatography.com/manongerard/

Not published yet.
 Last updated 30th October, 2023.
 Page 4 of 5.

Sponsored by **ApolloPad.com**
 Everyone has a novel in them. Finish Yours!

<https://apollopad.com>

Quotations

| | | |
|---|---------------------------|--|
| <code><abbr> ... </abbr></code> | Abbreviation or acronym | |
| <code><address> ... </address></code> | Address element | |
| <code><bdo> ... </bdo></code> | Text direction | <code>dir</code> [<i>ltr</i> / <i>rtl</i>] |
| <code><blockquote></code> | Long quotation | <code>cite</code> |
| <code><cite> ... </cite></code> | Citation: title of a work | |
| <code><q> ... </q></code> | Short quotation | <code>cite</code> |
| <code><dfn> ... </dfn></code> | Definition term | <code>title</code> |

Code

| | |
|---|---|
| <code><code> ...</code> | Defines programming code |
| <code></code></code> | Does not preserve extra whitespace and line-breaks, except if inside <code><pre></code> |
| <code><kbd> ... </kbd></code> | Defines keyboard input |
| <code><samp> ...</code>
<code></samp></code> | Defines computer output |
| <code><var> ... </var></code> | Defines a variable |

Other

| | | |
|---|------------------------|---|
| <code><!-- ... --></code> | Comment | |
| <code><a> ... </code> | Hyperlink | <code>href</code> <code>hreflang</code> <code>media</code> <code>ping</code> <code>rel</code> <code>target</code> <code>type</code> |
| <code><progress> ...</code>
<code></progress></code> | Progress of a task | <code>max</code> <code>value</code> |
| <code><meter> ... </meter></code> | Meter element: a gauge | <code>high</code> <code>low</code> <code>max</code> <code>min</code> <code>optimum</code> <code>value</code> |
| <code><dialog> ... </dialog></code> | Dialog | |

⚠ Comments visible in source code



By **Manon Gerrd**
(manongerard)

cheatography.com/manongerard/

Not published yet.
Last updated 30th October, 2023.
Page 5 of 5.

Sponsored by **ApolloPad.com**
Everyone has a novel in them. Finish Yours!
<https://apollopad.com>