
Overview of JBoss BRMS Cheat Sheet

by Natalie Moore (NatalieMoore) via cheatography.com/19119/cs/6048/

Red Hat JBoss BRMS Components

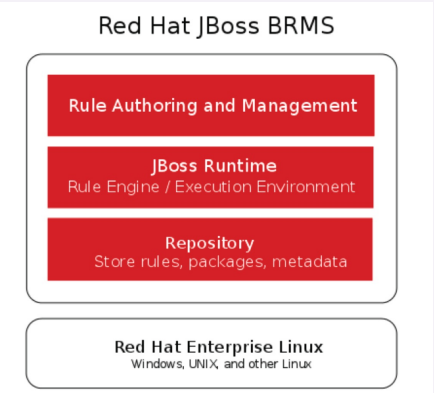

Software packages include: Expert, Guvnor, Flow, Fusion, and Drools integrated development environment (IDE).

Business rule structure

Declarative rules

when “condition” then “consequence”

Facts — Domain model objects used by Drools to evaluate conditions and execute consequences

Can be loaded from a database

Stated: Provided to rules engine by the caller

Inferred: calculated based on the stated facts

Does persist: May be long lived

Working memory

Holds objects acted upon by business rules

Business rule structure (cont)

Does not persist. Only lives while needed

Developer asserts 'facts' into 'working memory' and then tells engine to run rules. As the engine runs rules on the 'facts' in working memory the effect may result that the 'facts' change. The engine will run the rules again until no rules left to run.

Rules written in Drools are stored in .drl files.

BRMS Rule Components

LHS conditional elements

A list of constraints on facts (LHS)

Pattern: A pattern is zero or more constraints with optional binding.

RHS actions/consequences

An action executed by this rule if facts with the list of constraints are found in the working memory (RHS).

Methods of authoring rules

Business Central web interface

Technical rule editor - creates .drl file

Guided rule editor - creates .brl file

Decision table editor

DSL (Domain-Specific Language) natural language extensions

JBDS Drools perspective, rule resource wizard

Methods of authoring rules (cont)

Individual rule - creates .drl file

Rule package - creates .drl file

DSL (Domain-Specific Language) natural language extensions

Decision table

Spreadsheet or .csv file imported into JBDS project, or JBoss BRMS repository


In Business Central web interface

Bibliography

Red Hat Training

Authoring Rules for Red Hat JBoss BRMS - Student Workbook

Package: Deployable



BRMS supports the deployment of business rules to Red Hat JBossvMiddleware platforms and non-JBoss runtime environments.

Because the engine is based on Java EE, it is portable to any supported Java EE runtime.



By **Natalie Moore** (NatalieMoore)

cheatography.com/nataliemoore/

www.clipto.com/transcribe-audio-video-to-text-free?via=natalie

Published 7th September, 2016.

Last updated 1st November, 2016.

Sponsored by **CrosswordCheats.com**

Learn to solve cryptic crosswords!

http://crosswordcheats.com

A rule is a declarative statement of knowledge

Remember:	Rules are not called directly, and do not call other rules directly. Rules operate in response to facts only and are fired by the rule engine.

Working memory includes an API

update(object, handle) or **update(object)**

Tell the engine that an object has changed

However if property change listeners are provided to the JavaBeans that are inserted into the engine, it is possible to avoid the need to call update when the object changes.

insert(new Something())

Place a new object into the working memory


retract(handle)

Removes an object from working memory (delete)

insertLogical(new Something())

Same as insert except that object retracted when no more facts to support truth of firing rule

Pattern structure (LHS element)



There are three types of restrictions:
1. Single value restrictions.
2. Compound value restrictions.
3. Multi-restrictions.

When a restriction is applied to a field this becomes a constraint. When a constraint is applied to an object it becomes a pattern :)

Constraints (LHS)

Might be:

- single field
- inline "eval"
- constraint group (several field constr-aints tied together)

Connected using symbols:

'	Comma
&&	Represents **and**. All patterns match.
||	Represents **or**. Either pattern matches.

Operators are typically mathematical

==	Equal to
>	Greater than
<	Less than
>=	Greater than or equal to
<=	Less than or equal to

What Is A Rule?



Rules tell the system to look for certain patterns, and when found to perform certain actions.
"When" = Look for certain patterns
"Then" = Perform certain actions

Forward chaining

What is forward chaining?

Can be described logically as repeated application of modus ponens (the when, then statements). Forward chaining is a popular implementation strategy for expert systems, business and production rule systems.

As a rule fires, it can change the objects in working memory.

Some rules should fire before others

Forward chaining is in the rule engines to decide which rules to fire in which order

Recursive: rules are executed when the LHS conditions are met. The actions may change facts, causing new rules to be fired.

Important to understand. Understanding forward chaining will help get the most out of the rule engine

Modus Ponens

Latin name of a very old and common form of propositional logic

"P implies Q; P is asserted to be true, so therefore Q must be true."

If it is raining, I will meet you at the theater.
It is raining.
Therefore, I will meet you at the theater.



By **Natalie Moore**
(NatalieMoore)

cheatography.com/nataliemoore/
www.clipto.com/transcribe-audio-video-to-text-free?via=natalie

Published 7th September, 2016.
Last updated 1st November, 2016.

Sponsored by **CrosswordCheats.com**
Learn to solve cryptic crosswords!
http://crosswordcheats.com

RHS actions/consequences

Consequence or action required

Sctions to be executed by the rule.

Never use use imperative or conditional code on RHS

Must be atomic

"when this, then do this," not "when this, maybe do this or this."

Typical actions

update	Indicates that an object has changed and rules may need to be reconsidered.
insert	inserts a new object in working memory
insert-Logical	inserts a new object, but the object is automatically retracted when there are no more facts to support the truth of the rule.
retract	removes an object from working memory (delete)

Rules should be as declarative as possible. Think about whether it is a rule or code. Code belongs in the object model, utility classes and functions. Code should be kept out of rules as much as possible.

Java code should be limited to action statements (such as setting a value). Do not use if-else, for-while loops, or other Java logic.



By **Natalie Moore** (NatalieMoore)

cheatography.com/nataliemoore/
www.clipto.com/transcribe-audio-video-to-text-free?via=natalie

Published 7th September, 2016.
Last updated 1st November, 2016.

Sponsored by **CrosswordCheats.com**
Learn to solve cryptic crosswords!
http://crosswordcheats.com