


Operation

Create	This operation is used to create a new database or table, and to add new records to a table.	<pre>CREATE DATABASE databa se_ name; CREATE TABLE table_ name (column1 datatype, column2 datatype, ...); INSERT INTO table_ name (column1, column2, ...) VALUES (value1, value2, ...);</pre>
READ	This operation is used to retrieve data from a database.	<pre>SELECT column_ name FROM table_ name WHERE condition; SELECT * FROM table_ name;</pre>
UPDATE	This operation is used to modify existing records in a table.	<pre>UPDATE table_ name SET column1 = value1, column2 = value2 WHERE condition;</pre>
DELETE	This operation is used to remove records from a table, or to remove entire tables or databases.	<pre>DELETE FROM table_ name WHERE condition; DROP TABLE table_ name; DROP DATABASE databa se_ name;</pre>

code

```
CREATE DATABASE database_ name;
CREATE TABLE table_ name (column1 datatype, column2
datatype, ...);
INSERT INTO table_ name (column1, column2, ...)
VALUES (value1, value2, ...);
```

Image

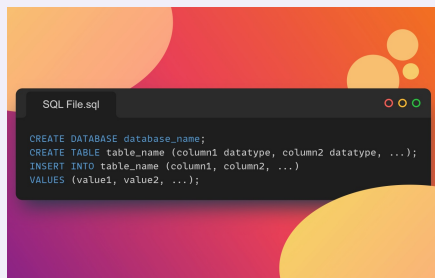

By WeBmAsTeErR

Not published yet.

Last updated 6th September, 2023.

Page 2 of 2.

Sponsored by [Readable.com](https://readable.com)

Measure your website readability!

<https://readable.com>

