


Class Members

public	+
private	-
package	~
protected	#
abstract	<i>italics</i>
static	underline
constant	ALL_CAPS

Sample Person Class

```
public class Person {  
    // member variables  
    private long id;  
    private String name;  
    private Date birthday;  
    // constructor  
    public Person(long id, String  
name,  
                Date birthday) {  
        this.id = id;  
        this.name = name;  
        this.birthday = birthday;  
    }  
    // rest of the class omitted  
    ...  
}
```

Person UML Diagram

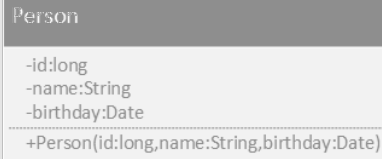

Should follow the following syntax

name : attribute type

therefore:

id : int

Default value

name : attribute type = default

value

id : int = 1



By **wedgess**
cheatography.com/wedgess/

Not published yet.
Last updated 22nd November, 2016.
Page 1 of 1.

Sponsored by **Readability-Score.com**
Measure your website readability!
<https://readability-score.com>